



Loading Selection Guide for puriFlash® IR-50SI

Average values for compounds < 800 MW
This data depends on the condition of elution and the products to be purified.

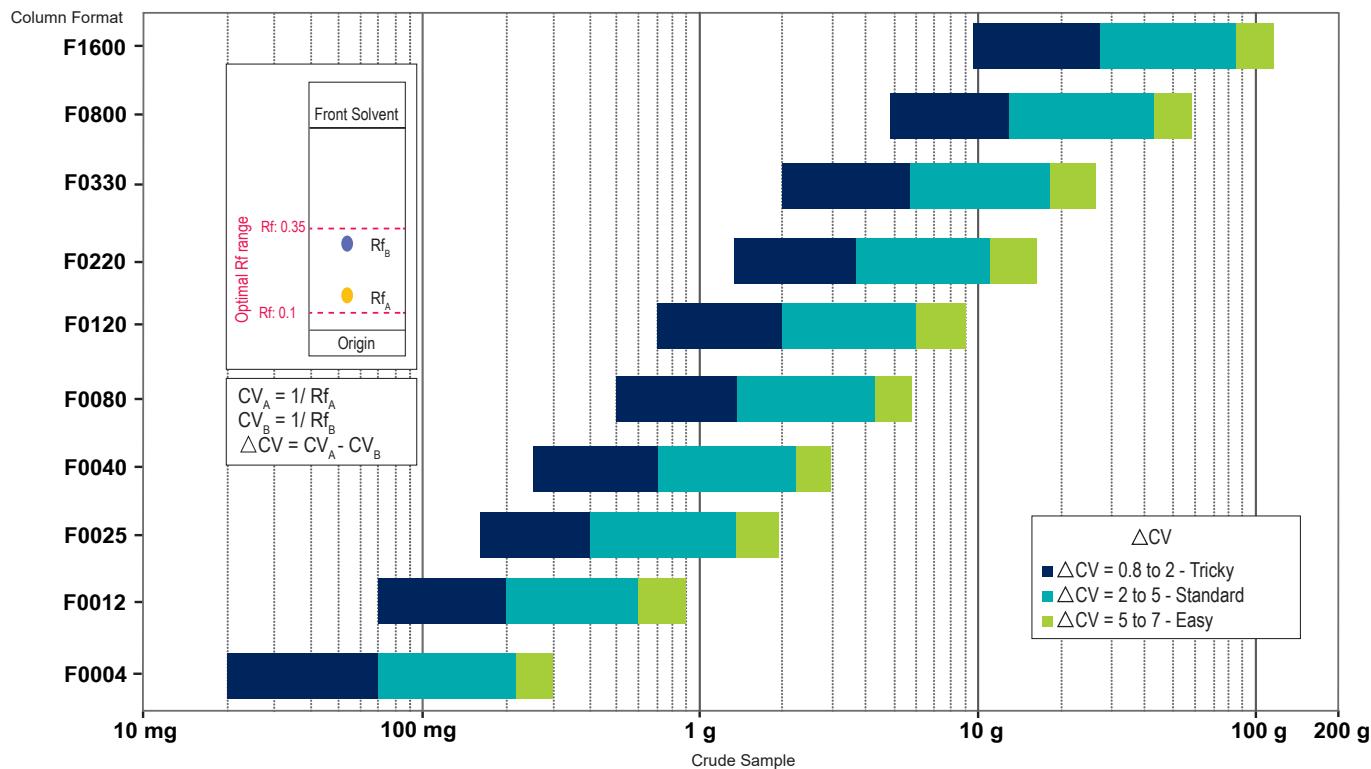


Loading Selection Guide for puriFlash® PF-50SIHC

Average values for compounds < 500 MW
This data depends on the condition of elution and the products to be purified.

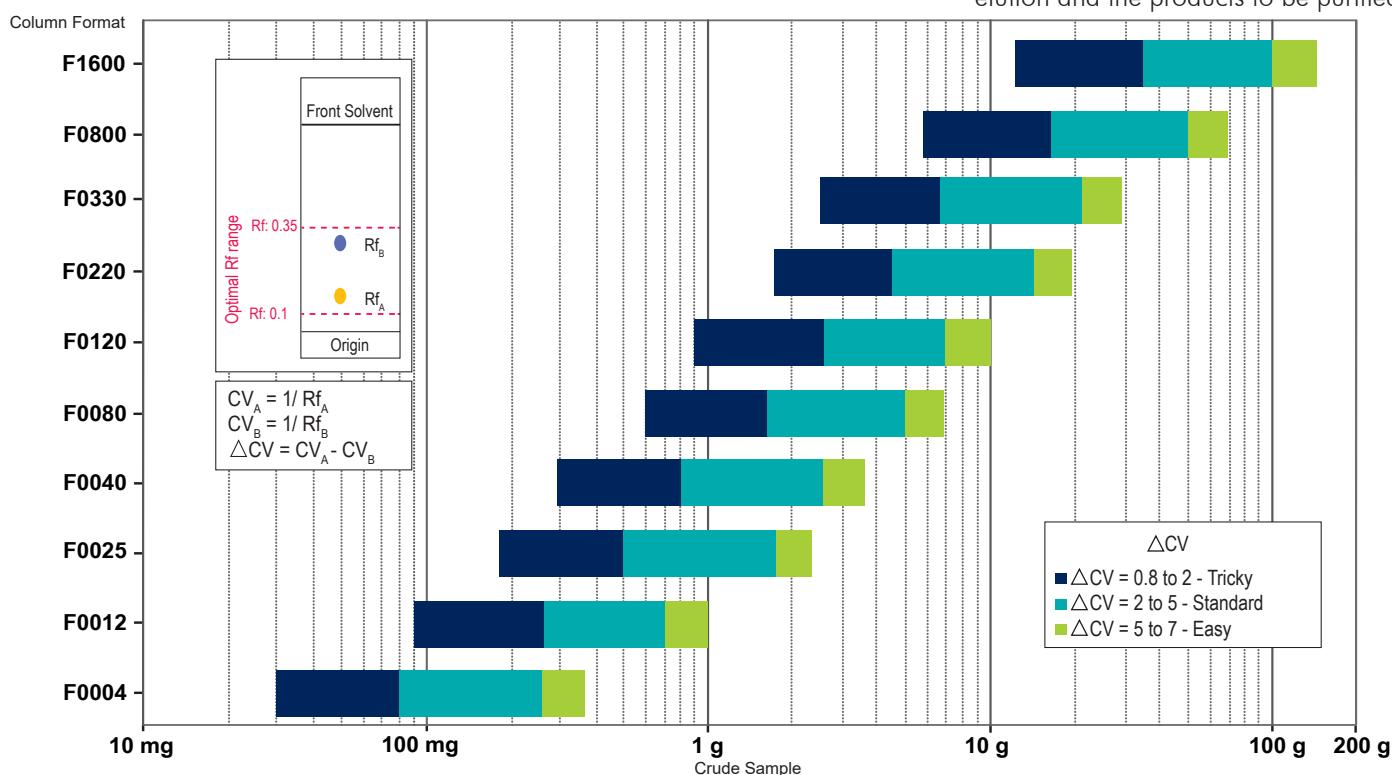


Loading Selection Guide for puriFlash® PF-50SIHP

Average values for compounds < 800 MW
This data depends on the condition of elution and the products to be purified.

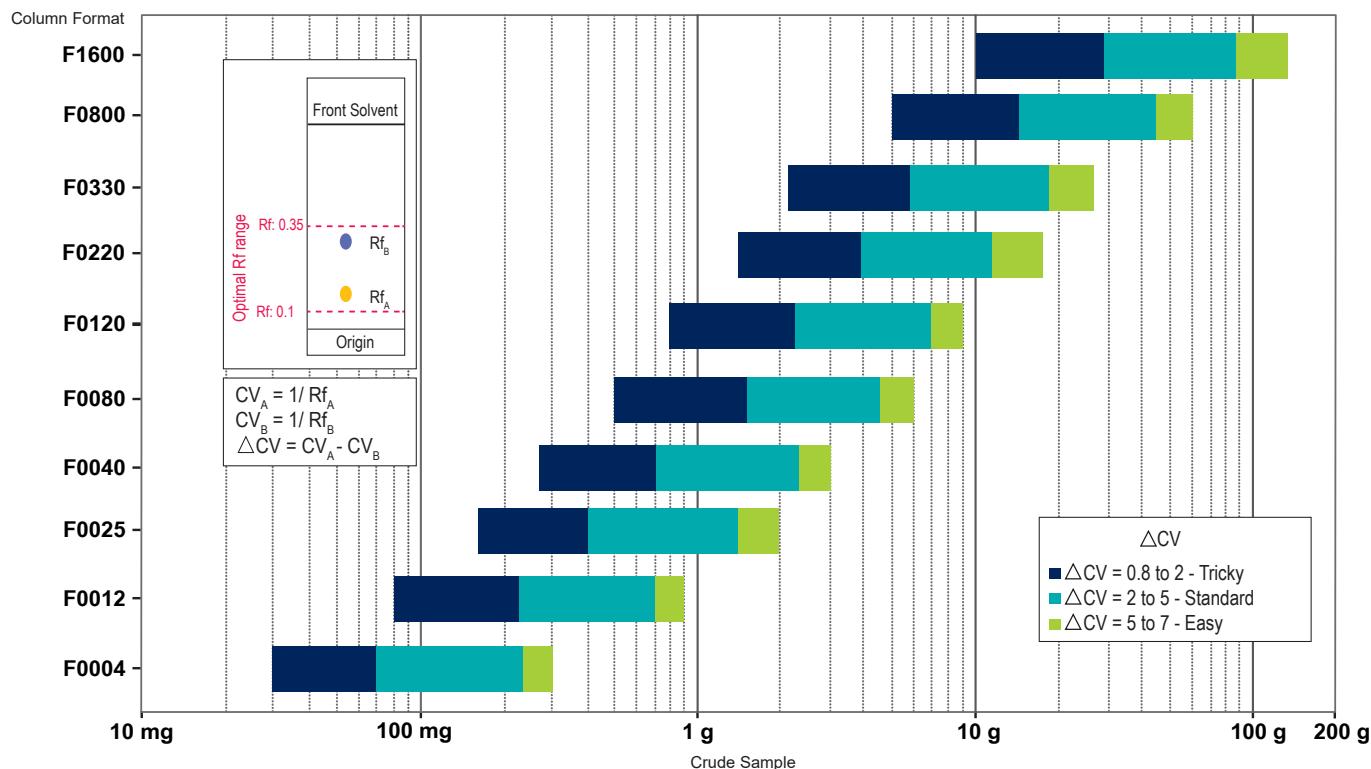


Loading Selection Guide for puriFlash® PF-30SIHP

Average values for compounds < 800 MW
This data depends on the condition of elution and the products to be purified.

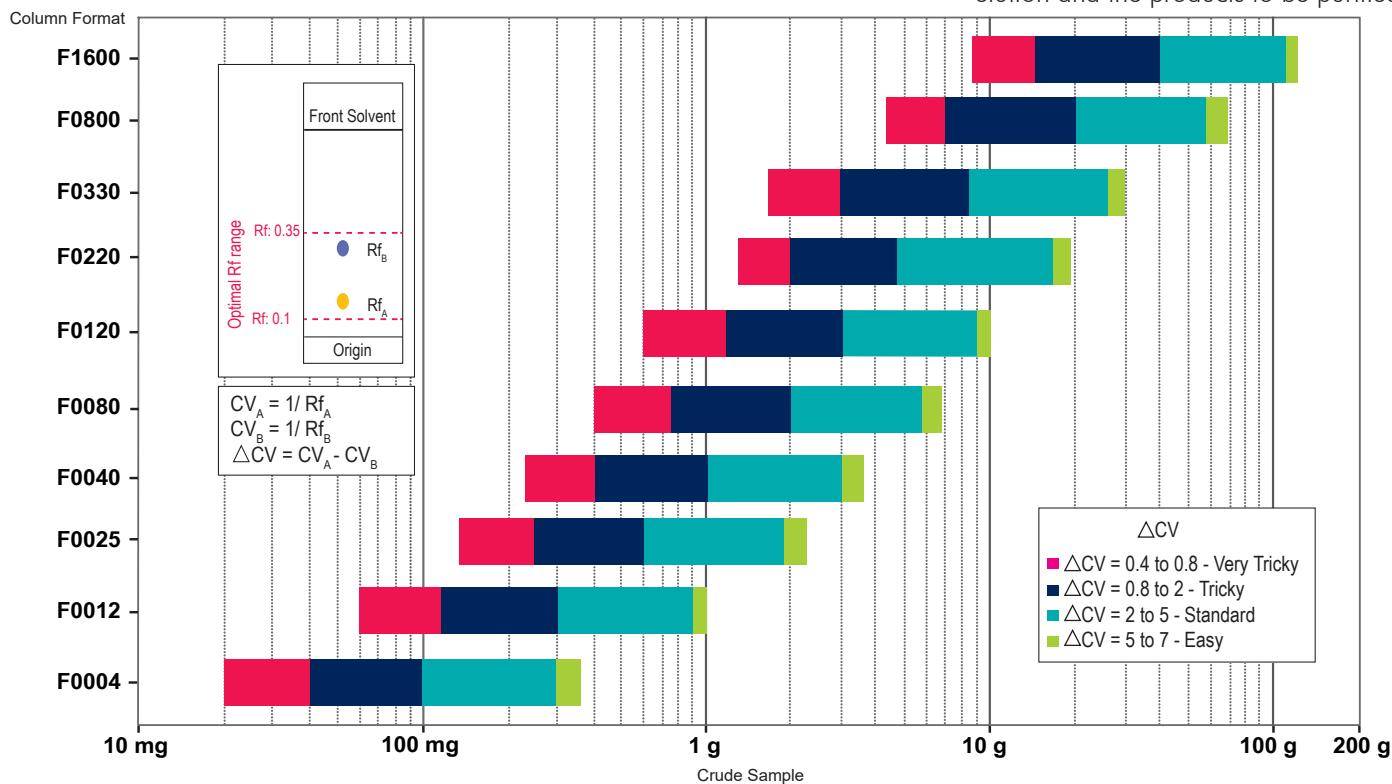


Loading Selection Guide for puriFlash® PF-25SIHC

Average values for compounds < 500 MW
This data depends on the condition of elution and the products to be purified.

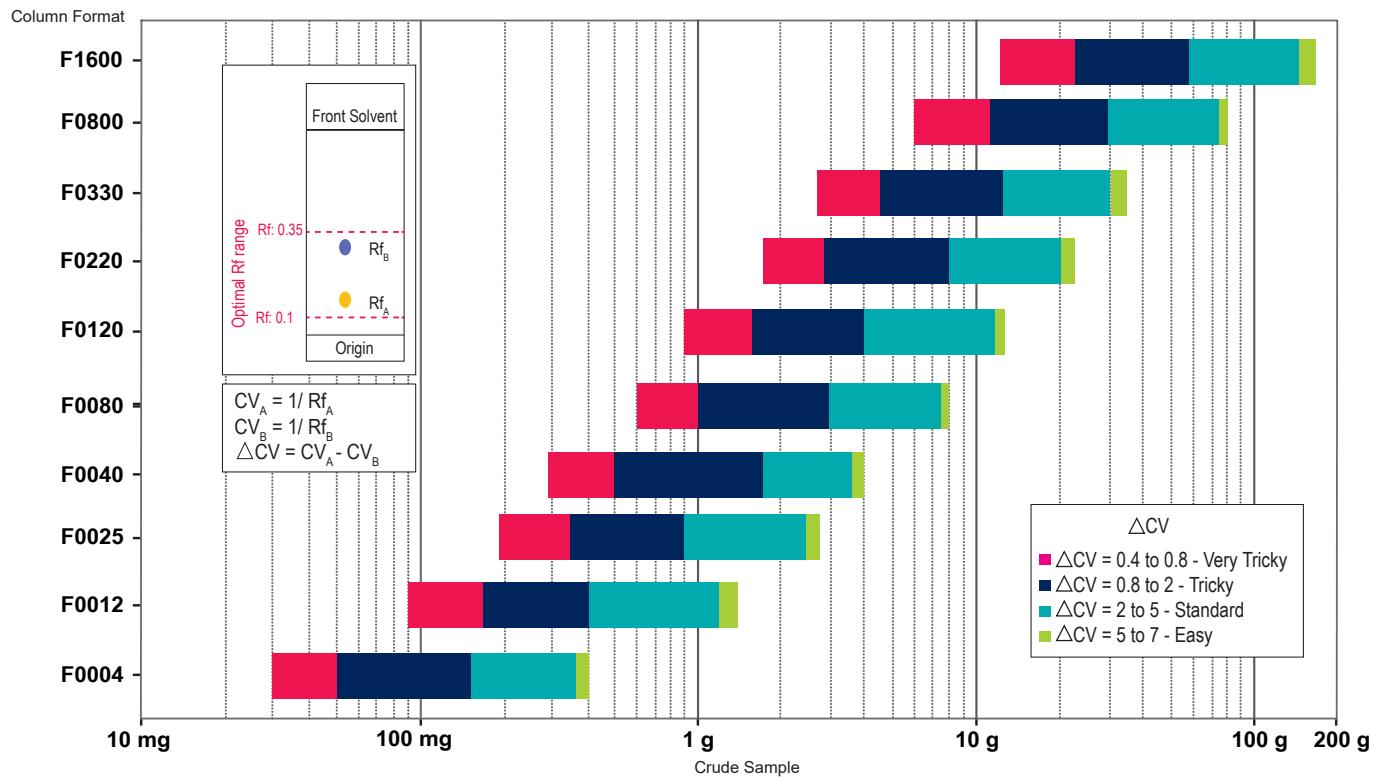


Loading Selection Guide for puriFlash® IR-20SI

Average values for compounds < 800 MW
This data depends on the condition of elution and the products to be purified.

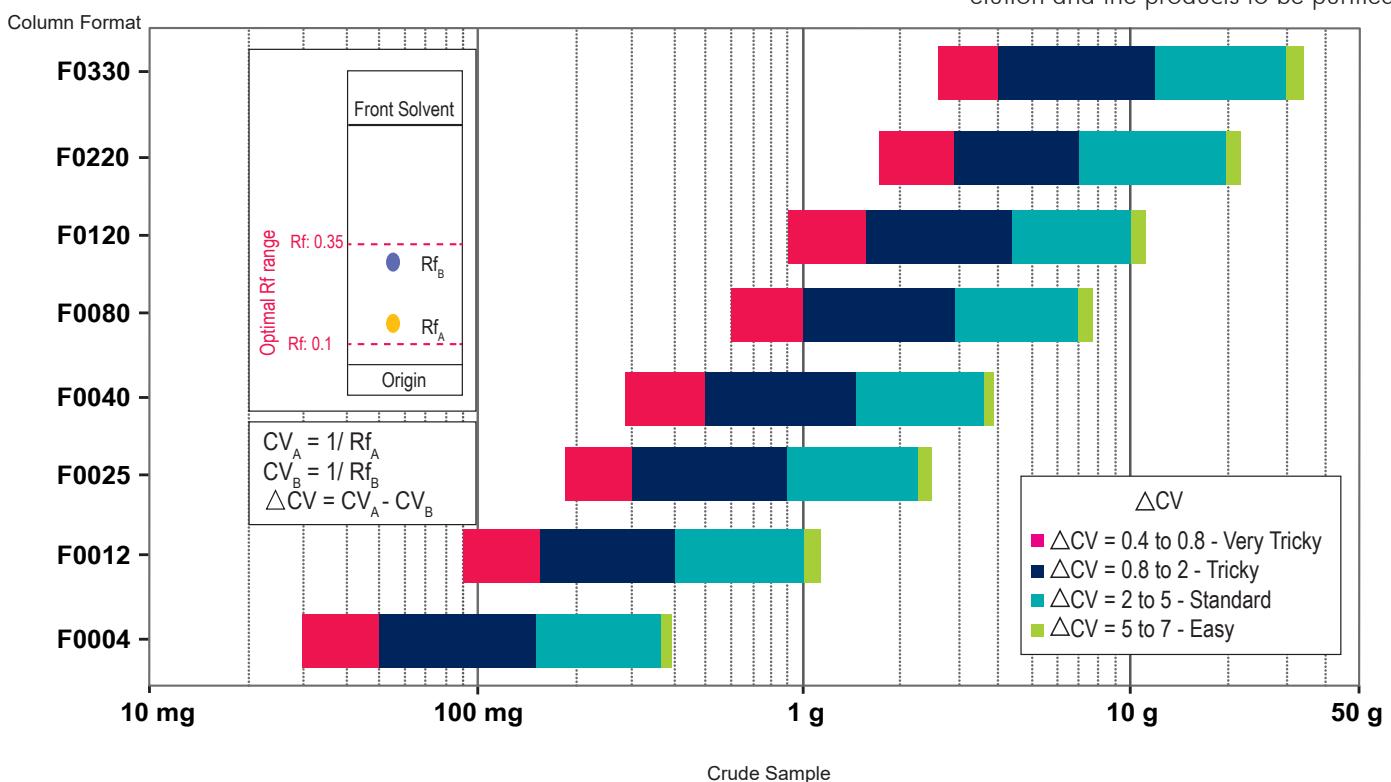

Loading Selection Guide for puriFlash® PF-15SIHP

Average values for compounds < 800 MW
This data depends on the condition of elution and the products to be purified.

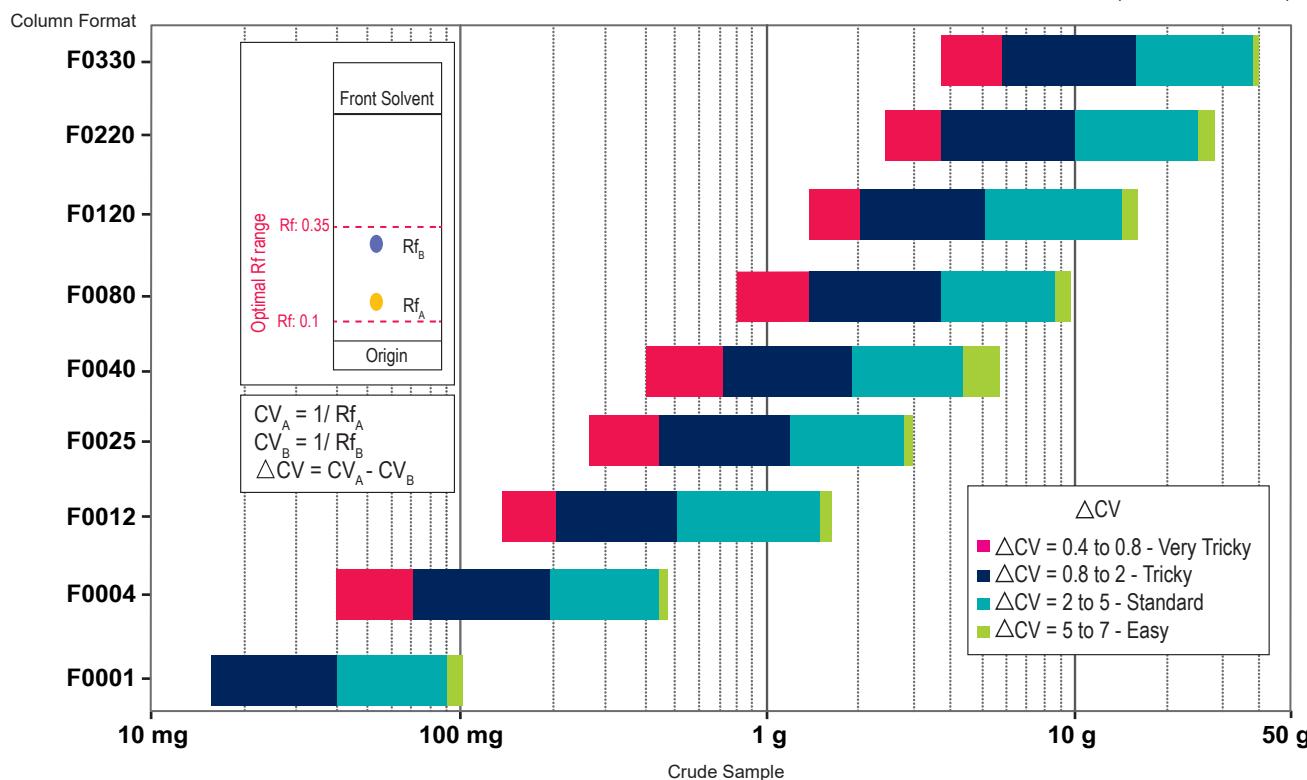

Loading Selection Guide for puriFlash® PF-15SIHC

Average values for compounds < 500 MW
This data depends on the condition of elution and the products to be purified.

